

DME DIGITAL MULTIDROP EXTENDER

RS-232
Line Driver



FEATURES / BENEFITS

- ✓ Interface - RS-232 and Dedicated 4-Wire
- ✓ Data Rates - Synchronous to 64Kbps
- ✓ DCE/DTE Selectable RS-232 port
- ✓ Point-to-Point or Multi-point Operation up to 32 drops
- ✓ Timing - Internal or External
- ✓ Data Carrier Detect (DCD) - Constant or Switched Carrier operation
- ✓ Contention - Selectable for RTS or Data
- ✓ Anti-Streaming - Enable or Disable
- ✓ RTS/CTS - Variable delay settings
- ✓ 110/220VAC switch selectable

DESCRIPTION

The Digital Multidrop Extender (DME) utilizes state of the art digital CMOS technology to provide a feature filled product at a very affordable price. The DME transmits and receives data bi-directionally at data rates up to 64kbps. The unit is designed for synchronous Point-to-Point or Multi-point operation.

Applications that benefit from the DME are Polled / Contention networks operating on Switched or Constant Carrier Operation. The DME allows the user to set up a fully digital multipoint network over a campus environment by connecting directly to the back of a CSU/DSU. In this scenario, clocking is provided by the DDS while the DME transmits digital data bi-directionally as the DTE devices are polled from the Host site.

Substantial cost savings are derived by eliminating the need for a Time Division Multiplexer (TDM) or Digital Sharing Device (DSD) behind the CSU/DSU. Additionally, analog Line Drivers are no longer required from the subchannel ports of the TDM or DSD to remote DTE devices.

Installation is fast and simple by setting the internal DCE/DTE switch, Clocking, Constant or Switched Carrier Operation and the Contention Mode of RTS or Data.

The DME provides optional Anti-Streaming circuitry. Once enabled, Anti-Streaming will automatically remove a defective DTE from service if the Data / Control criteria is present for the user defined selection period.

The DME is housed in a sturdy metal enclosure and operates on 110/220VAC.

The DME has a three year warranty and a 24 hour turnaround on warranty repairs.



EAST COAST DATACOM, INC.

SPECIFICATIONS

Application

Full Duplex Synchronous Point-to-Point or Multi-point Digital Data Transmission

Capacity

Up to 32 drops per site

Interface

RS-232 and 4-Wire EMI reduced RS-485

Data Rates

2.4k to 64Kbps with 3/4 baud rates

Driving Distance

Dependent on data rate and wire gauge

Switches

DCE/DTE for RS-232 port

RS-232 Physical Interface

Female DB-25 Connector

4-Wire Physical Interface

(2) RJ-45's and 4-Position Terminal Block

Line Requirements

Four Wire private, unloaded with no bridge taps

Power Source

100-120 to 200-220VAC @10%, 50/60Hz, 0.16/0.08A, external 110/220 volt select switch, IEC Power Inlet, (2) 5mm Fuses

Environmental

Operating Temperature . . .32° to 122° F (0° to 50° C)
Relative Humidity5 to 95% Non-Condensing
Altitude0 to 10,000 feet

Regulatory Approvals Tested According to

UL 60950-1:2003, CAN/CSA-C22.2 No. 60950-1:2003, FCC Part 15, Class A

Dimensions

Height1.75 inches (4.44cm)
Width7.90 inches (20.07 cm)
Length9.00 inches (22.86 cm)

Weight

2 pounds (0.914Kg)

Warranty

Three Years, Return to Factory

ORDERING INFORMATION

Part Number: 106000

Model: DME

Description: Digital Multidrop Extender

INCLUDED WITH EACH UNIT:


- 1) Operations Manual
- 2) U.S.A. Grounded Power Cord, Part #713015
- 3) Optional Power Cords
 - A) United Kingdom, Part #713016
 - B) Continental Europe, Part #713017
 - C) Other: Specify Country on Purchase Order

OPTIONAL ACCESSORIES

- 1) Spare Data Center Fuses
 - A) 160ma Fuse, Qty (2) Part #714000
 - B) 80ma Fuse, Qty (2) Part #714001

For further detailed technical information on this product, contact East Coast Datacom Technical Assistance toll free at (800) 240-7948

EAST COAST DATACOM DESIGNS AND MANUFACTURES DATA COMMUNICATION EQUIPMENT FOR YOUR NETWORK REQUIREMENTS.

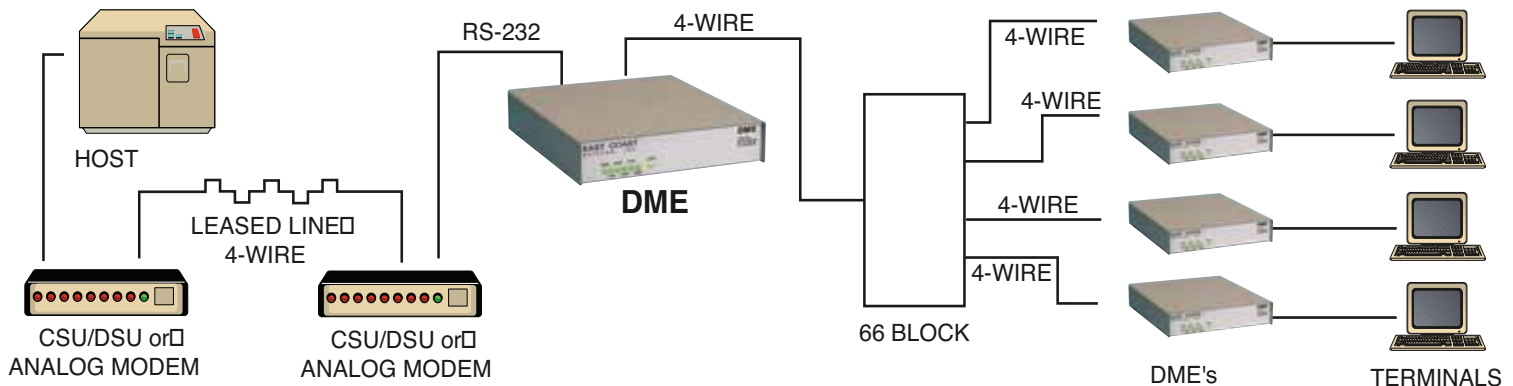

SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE

DOC # 721005-B

EAST COAST DATACOM, INC.

245 Gus Hipp Boulevard, STE 3
Rockledge, FL 32955-4812 U.S.A.

TEL: (321) 637-9922

WEB SITE: www.ecdata.com

FAX: (321) 637-9980