

RS-232 MODEM SHARING DEVICES

MSD 4 and MSD 8



FEATURES / BENEFITS

- ✓ Interface - EIA RS-232, CCITT V.24, DB-25 Female Connectors
- ✓ Data Rates - Synchronous or Asynchronous up to 128Kbps
- ✓ Anti-Streaming - Automatic or Manual for unattended Circuit Restoral
- ✓ Individual Subchannel Enable/ Disable Switches
- ✓ Visual Indication of Subchannel Activity
- ✓ Receive Data - Broadcast to all Subchannels
- ✓ Transparent to Data
- ✓ Fully Cascadable
- ✓ External Clocking
- ✓ Sturdy Metal Enclosure
- ✓ 110/220VAC Switch Selectable
- ✓ +/- 15KV ESD Protection

DESCRIPTION

The Modem Sharing Device (MSD) products consist of 4 and 8 port units. The MSDs provide the network manager with a cost effective means of expanding existing, leased line polled networks without adding computer ports or communications links. With the MSD's, up to eight terminals can share the same port and communications link using the contention and control protocols normally resident in the host hardware and software. Once installed, system and network efficiency are increased through higher host processor utilization coupled with the significant decrease in idle time between host / terminal traffic sessions.

Ideal for either synchronous or asynchronous network environments, the MSDs are protocol transparent at data rates up to 128Kbps. Data arriving at the Master Port is continually broadcast to all Subchannels. The attached terminal device that raises the RTS control signal is automatically given control of the MSD until data transmission is complete. Clocking is accomplished from the attached Modem.

The MSDs incorporate optional Anti-Streaming circuitry. If enabled, Anti-Streaming will automatically remove a defective terminal from service if the Data / Control criteria is present for the user predefined selection period.

Housed in a sturdy metal enclosure and equipped with an internal 110/220VAC switch selectable linear power supply, the MSDs will provide in excess of 100,000 hours of reliable service.

The MSDs have a three year warranty and a 24 hour turnaround on warranty repairs.



EAST COAST DATACOM, INC.

SPECIFICATIONS

Application

Multiple Sync/Async terminal or DTE devices operating in a polled environment, to share one Modem

Capacity

One to eight RS-232 Sync/Async devices

Interface

EIA RS-232, CCITT V.24 using DB-25 female connectors, +/- 15KV ESD Protection

Data Rates

Up to 128Kbps

Data Format

Data transparent at all data rates

Timing

External; from attached Modem

Anti-Streaming

Automatic . . .Selectable time out intervals
DisableSelectable via dip switch

Terminal Service Modes

Scanning or Priority

Front Panel

Indicators . . . Power, Transmit Data, Receive Data, Channel Active, Channel Stream
Switches Enable/Disable of each Subchannel

Power Source

100-120 to 200-220VAC @ 10%, 50/60Hz, 0.16/0.08A, external 110/220 volt select switch, IEC Power Inlet, (2) 5mm Fuses

Regulatory Approvals Tested According To

UL 60950-1:2003, CAN/CSA-C22.2 No. 60950-1:2003
CE Safety EN60950 and CE EMC EN300-386-2

Environmental

Operating Temperature . . .32° to 122° F (0° to 50° C)
Relative Humidity.. . . .5 to 95% Non-Condensing
Altitude.0 to 10,000 feet

Dimensions (MSD-4 & MSD-8)

Height1.75 inches (4.44cm)
Width13.35 inches (33.09 cm)
Length9.00 inches (22.86 cm)

Weight

MSD-4 and MSD-8 4.5 pounds (2.1 Kg)

Warranty

Three Years, Return to Factory

ORDERING INFORMATION

Model: MSD-4

PT# 101000

Description: 4-Port Sharing Device, Small Chassis

PT# 101030

Description: 4-Port Sharing Device, 1U Rkmt. Chassis

Model: MSD-8

PT# 102000

Description: 8 Port Sharing Device, Small Chassis

PT# 102015

Description: 8-Port Sharing Device, 1U Rkmt. Chassis

INCLUDED WITH EACH UNIT:


- 1) Operations Manual
- 2) U.S.A. Grounded Power Cord, Part #713015
- 3) Optional Power Cords

A) United Kingdom, Part #713016

B) Continental Europe, Part #713017

C) Other: Specify Country on Purchase Order

EAST COAST DATACOM DESIGNS AND MANUFACTURES DATA COMMUNICATION EQUIPMENT FOR YOUR NETWORK REQUIREMENTS.

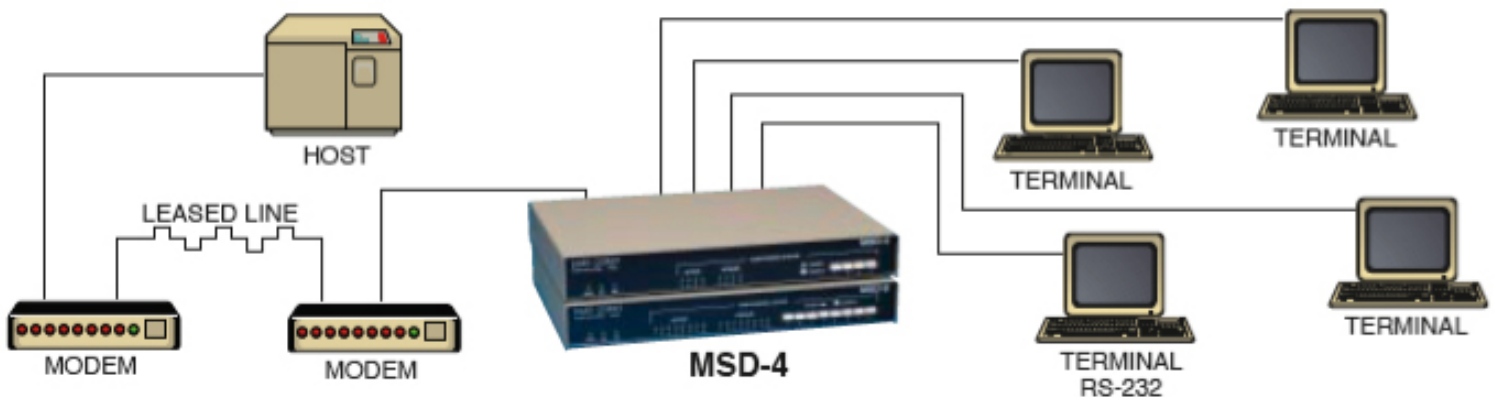

SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE

DOC # 721002

EAST COAST DATACOM, INC.

245 Gus Hipp Boulevard, STE 3 • Rockledge, FL 32955-4812 U.S.A.

TEL: (321) 637-9922

WEB SITE: www.ecdata.com

FAX: (321) 637-9980